


Dimension DN 200 to DN 1200 - Wall fixing - with adjustable counter weight -

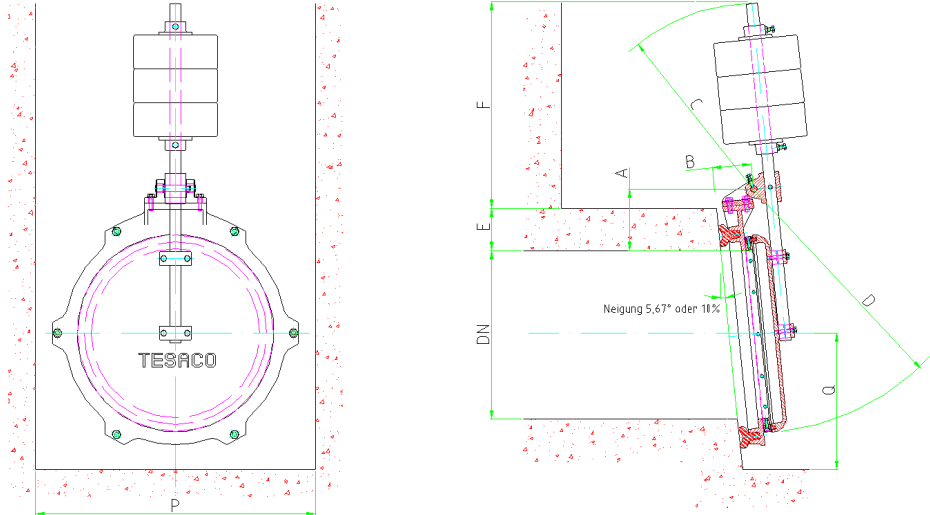

| Dimension | A | B | C | D | E | F | P | Q | Weight [kg] |
|-----------|-----|-----|------|------|-----|------|------|-----|---------------|
| DN 200 | 120 | 75 | 310 | 350 | 75 | 350 | 400 | 200 | 25 |
| DN 250 | 120 | 75 | 265 | 400 | 75 | 370 | 450 | 225 | 28 |
| DN 300 | 120 | 75 | 380 | 450 | 100 | 420 | 500 | 250 | 30 |
| DN 350 | 120 | 85 | 390 | 500 | 100 | 420 | 550 | 275 | 50 |
| DN 400 | 150 | 85 | 480 | 600 | 120 | 520 | 600 | 300 | 55 |
| DN 450 | 180 | 85 | 525 | 670 | 120 | 580 | 700 | 345 | 60 |
| DN 500 | 180 | 100 | 550 | 720 | 120 | 620 | 800 | 370 | 70 |
| DN 600 | 190 | 100 | 650 | 820 | 120 | 820 | 900 | 420 | 170 |
| DN 700 | 175 | 100 | 755 | 920 | 150 | 820 | 1000 | 500 | 210 |
| DN 800 | 185 | 100 | 800 | 1020 | 150 | 820 | 1100 | 550 | 230 |
| DN 900 | 185 | 100 | 815 | 1120 | 150 | 850 | 1200 | 600 | 250 |
| DN 1000 | 185 | 100 | 890 | 1250 | 150 | 950 | 1300 | 650 | 370 |
| DN 1200 | 210 | 100 | 1270 | 1470 | 150 | 1350 | 1500 | 750 | 550 |

All dimensions in mm

Design: TESACO, acc. to DIN 19569-4

Material: Frame and flap (Cover) fabricated from DIN EN 1561 EN-GJL-250 (GG-25)
 Frame sealing as exchangeable block seal made from corrosion resistant bronze
 Flap sealing made from waste water resistant neoprene
 Bearing pin made from S.S. 316
 Bearing bushing made from corrosion resistant bronze
 Wall sealing made from rubber neoprene
 Counter weight made from cast iron
 Fastening elements made from S.S.316

Corrosion protection: Shot blasting acc. DIN ISO 55928, SA 2 1/2
 with 400 µm Polyurethane or Epoxy coating